



MADE IN THE UK

Drum & Pipe Repair

Plug N Dyke Putty

- Provides a temporary seal in damaged leaking drums
- Applied directly over the leak to form an immediate seal
- Oil and petrol resistant
- Can be applied to dirty, greasy or rusty surfaces without any preparation
- Manufactured from a non-toxic material
- 5 year shelf life providing it remains unopened and is stored out of direct sunlight



Code Description

PLUG N DYKE PUTTY

| | |
|-----------|-------------------------|
| FL-42-501 | Plug N Dyke Putty 0.5kg |
| FL-42-502 | Plug N Dyke Putty 1.0kg |

Plug N Dyke Putty

NEW

- Forms a putty when mixed with water to create an effective seal against fuels, solvents and chemicals
- Can be applied direct to the surface and sprayed with water to activate or mixed with water to create a paste
- Adheres to dirty, crumpled surfaces even with the fluid escaping
- No surface preparation is required
- Non-flammable




Code Description

PLUG N DYKE GRANULAR

| | |
|-----------|----------------------------|
| FL-42-515 | Plug N Dyke Granular 22kgs |
|-----------|----------------------------|

Quick Wrap Bandage

- Suitable for emergency repairs to gas, oil, water, waste pipes and chemical lines
- Quick and easy to use
- Good temperature, pressure and chemical resistance
- Sets in under 10 minutes and is fluid compatible
- No mixing or measuring, simply soak in water for 10 seconds
- Food safe when cured

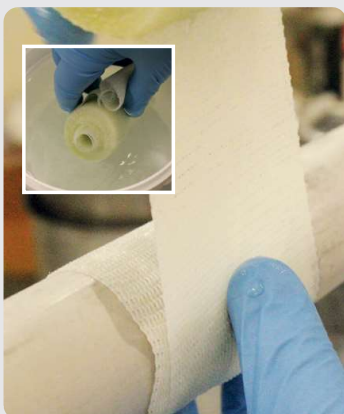

Code Description Dimensions W x L

QUICK WRAP BANDAGE

| | | |
|-----------|--------------------------------|--------------|
| FL-42-505 | Pipes Up To 45mm External Dia | 50mm x 1.5m |
| FL-42-506 | Pipes Up To 75mm External Dia | 50mm x 3.6m |
| FL-42-507 | Pipes Up To 75mm External Dia | 75mm x 3.6m |
| FL-42-508 | Pipes Up To 100mm External Dia | 100mm x 3.6m |

Strap It Leak Stopper

- Emergency leak stopper designed for all pipe work systems
- Simply wraps over the leak and locks with hook and loop system
- Seals leaks under pressure without having to shut down the system
- Manufactured from EPDM rubber
- Chemical resistant
- Temperature range -40 to 120 deg C



Code Description Pressure Tested Bar

STRAP IT LEAK STOPPER

| | | |
|-----------|--------------------|-------|
| FL-42-509 | Pipes 15 - 25mm NB | 10.26 |
| FL-42-510 | Pipes 25 - 80mm NB | 6 |
| FL-42-511 | Pipes 50 - 80mm NB | 3.9 |
| FL-42-512 | Pipes 100mm NB | 3.5 |